

10074 S.W. Arctic Drive
Beaverton, Oregon 97005
phone 503.641.7287
fax 503.626.0281
e-mail orders@biamp.com

Customer Number:

P.O. Number:

P.O. Date:

Ship Via:

Ship Date:

SOLD TO:

NAME

ADDR 1

ADDR 2

CITY

STATE ZIP

COUNTRY

SHIP TO : Same as SOLD TO

NAME

ADDR 1


ADDR 2

CITY

STATE ZIP

COUNTRY

LINE	PART#	** ONE CONFIGURATION PER ORDER FORM **	SELECT CHASSIS
1	911.0234.900	AudiaFLEX NC (non-CobraNet)	<input type="checkbox"/>
2	911.0233.900	AudiaFLEX CM (with CobraNet)	<input type="checkbox"/>
3	901.0176.900	IP-2 (2-channel Mic/Line Input Card)	<input type="checkbox"/>
4	901.0227.900	AEC-2HD (2-channel Echo Canceller Card)	<input type="checkbox"/>
5	901.0193.900	TI-2 (2-channel Telephone Interface Card)	<input type="checkbox"/>
6	901.0206.900	OP-2e (2-channel Mic/Line Output Card)	<input type="checkbox"/>
7	901.0231.900	PA-2 (2-channel Power Amplifier Card)	<input type="checkbox"/>
Total Quantity of Input/Output Cards (12 maximum)			<input type="checkbox"/>
Total Quantity of Units with Above Configuration			<input type="checkbox"/>

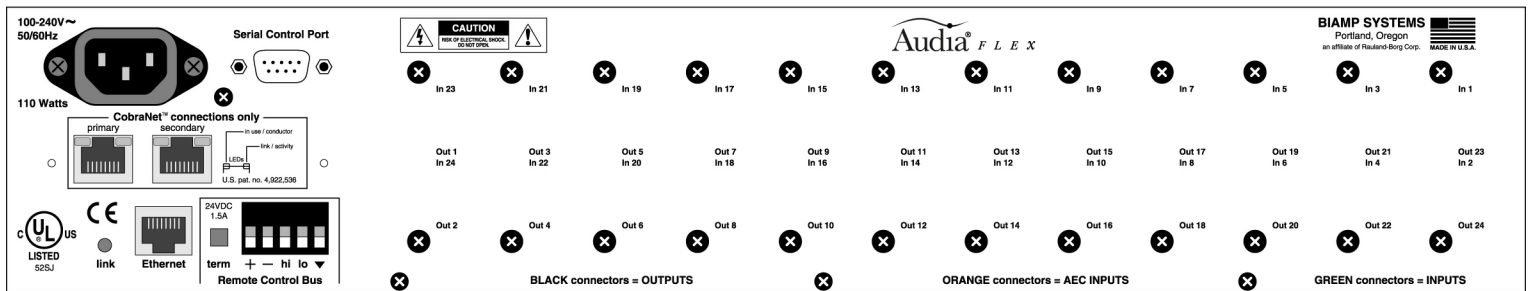

The physical location of I/O cards within an AudiaFLEX chassis is always as follows: Inputs starting from right (IP-2, AEC-2HD, TI-2); Outputs starting from left (PA-2, OP-2e)

7

ORDERED BY:

ADDITIONAL INSTRUCTIONS: